


## Description



The result of the long-standing expertise of Pizzato Elettrica in the creation of position switches, the NA, NB, NF series achieve the highest standard of flexibility and depth of range present today on the pre-wired switches market.

Configurable, adjustable, pivotable and, not least, customisable with special cables or custom wiring - these features make these series unique in the current European panorama, ideal for easily providing our customers with customised switches.

## Switches with connectors




The new fundamental feature of this series of pre-wired switches is that the switch body and the wired connector are separated.

Using the connector the end-user can replace a product on field without having to disconnect the complete wiring.

Moreover in this way it is easier to combine products with different cable types and lengths.

## Head with variable orientation

All heads can be turned in 90° steps. The new head for swivelling levers has been designed with compact dimensions so that it does not protrude over the switch profile. Therefore, it is also possible to install the switches on the wall.

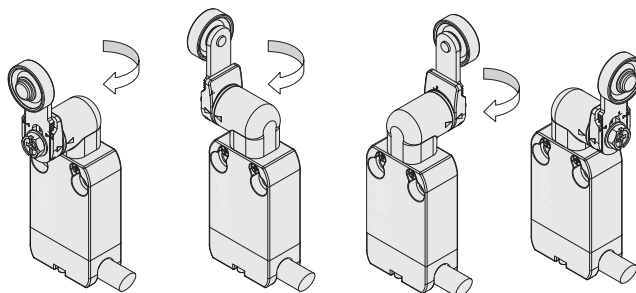


## Protection degrees IP67 and IP69K

**IP69K**  
**IP67**

These devices are designed to be used in the toughest environmental conditions and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where maximum protection degree of the housing is required. Due

to their special design, these devices are suitable for use in equipment subjected to cleaning with high pressure hot water jets. These devices meet the IP69K test requirements according to ISO 20653 (water jets with 100 bar and 80°C).

## Reversible levers

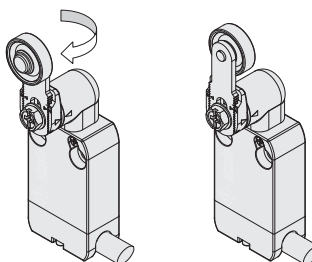


For switches with swivelling lever, the lever can be fastened on straight or reverse side maintaining the positive coupling.

In this way two different working planes of the lever are possible.


## Adjustable levers

For switches with swivelling lever, the lever can be adjusted in 10° steps over the entire 360° range.

The positive movement transmission is always guaranteed thanks to the particular geometrical coupling between the lever and the revolving shaft as prescribed for safety applications by the German standard BG-GS-ET-15.

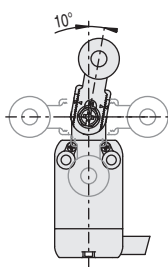


## Orientable cable outputs

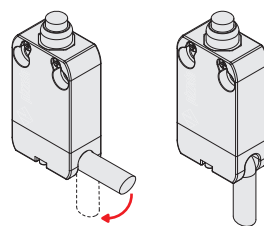

The connector with cable is provided with a cavity to allow cable bending up to 90°.

In this way a flush wall mounting is also possible as well as an easier adjustment of the cable to the supporting flange.


## 90° redirection for actuators



This component highly extends the application possibilities of this product range.

All the actuators that can be attached directly to the body of the switch can also be fastened on this transmission, thus making feasible applications and positioning of the switch that were previously impossible.


The redirection piece can also be used in case of heads for swivelling levers. Although technically possible, the use of multiple transmissions in series is not recommended.

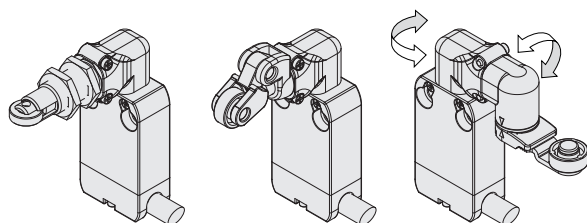

## Unidirectional heads


All switches with swivelling lever are supplied with a selector for choosing the lever operating direction.

The following operations are possible: right/left (standard factory setting), only from the right or only from the left. The operating direction can be selected by rotating the dedicated ring mounted on all heads of this kind.

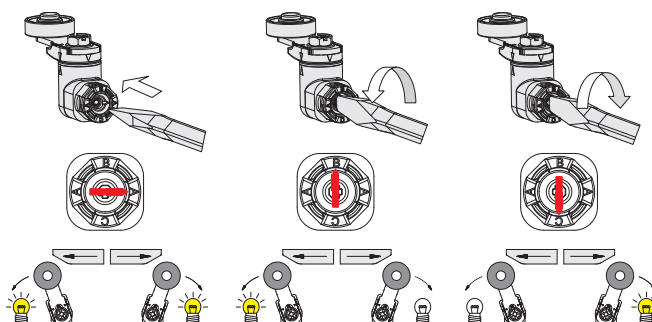

### Increased or reduced actuating force

For actuators with swivelling lever, versions with increased or reduced actuating force are available upon request, in order to have a switch perfectly tailored for the application. For further information contact our technical department.

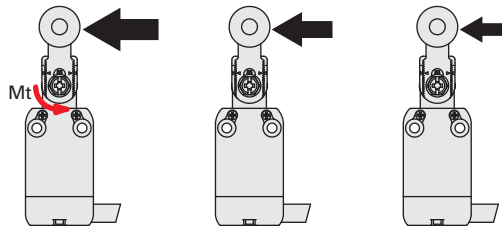


**Forza maggiorata**  
Mt = 0,09 Nm  
(opzione E25 serie NA NB)

**Forza standard**  
Mt = 0,07 Nm

**Forza ridotta**  
Mt = 0,04 Nm  
(opzione E24)

### Positive opening contact blocks with 1, 2, 3 or 4 poles

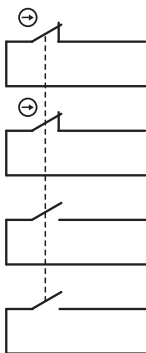

These series of contact blocks are versatile and compact.

They have the same dimensions of the previous versions, but now it is possible to have up to 4 different contacts which are galvanically separated and provided with positive opening (NC contacts).


The allowed standard combinations are: 1NO+1NC, 2NC, 1NO+2NC, 2NO+2NC. Other combinations available on request.

The contact blocks have been designed so that they keep the same pin assignment on the connector independently of the action type (slow or snap action) and the number of contacts. In this way, the same cables with connector can be used for units with slow action and snap action as well.


### Reversible housing

The shape of the fixing holes and of the switch body, as well as the possibility of rotating the head, make this switch perfectly symmetrical.

If a switch with cable output on the left (since the connector cannot be rotated) is required, it is possible to rotate the complete device by maintaining the final position of the actuator unchanged.

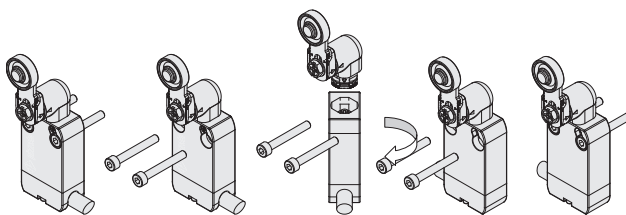

### M12 connectors

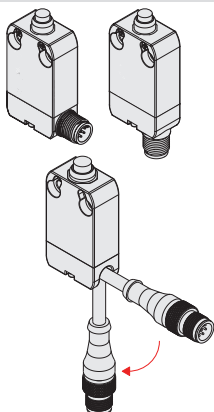

All contact configurations are available with M12 connector both with two contacts (with 5-pin M12 connector) as well as 3 or 4 contacts (with 8-pin M12 connector). Exit directions below or to the right allow application in narrow spaces; in addition the reversible housing easily allows changing the exit direction from right to left by simply turning the switch. The M12 connector is also available at the end of the cable, whose length can be tailored to the customer's requirements, and the cable can be bent at 90°, allowing installation on walls.


### Adjustable levers with anti-unscrewing washer

In some applications during the installation of the switches problems are encountered due to the variability of the fastenings and the folds of the structural work.

In other cases, small finishing adjustments are required due to the application. Nearly all swivelling levers for switches of the NA, NB and NF series can be adjusted in 1 mm steps along the switch length.

This feature, combined with the additional possibility of the radial adjustment of the actuator, provides the installer with a never before achieved flexibility in the final adjustment of the product.


All this while maintaining the positive geometric locking between lever and swivel shaft as prescribed for safety applications.

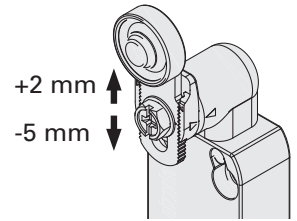

### Switch components available separately

This product series has been provided with a modular design so that single parts can also be ordered separately. This is an asset both for distributors and for final customers of electrical material in the procurement of spare parts as well as for custom combinations.

**NA B110BB-DN2**    **NA B11000**    **VN AA0BB**    **VN CM11DN2**

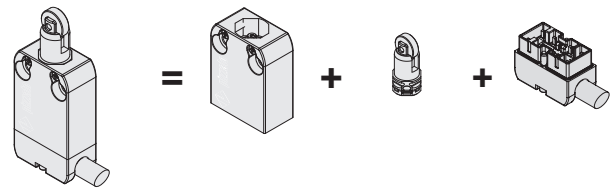


### Extended temperature range

**-40°C**

These devices are also available in a special version suitable for an ambient operating temperature range from -40°C up to +80°C.


They can therefore be used for applications in cold stores, sterilisers, and other equipment operated in very low-temperature environments. The special materials used to produce these versions retain their characteristics even under these conditions, thereby expanding the installation possibilities.

### AMP connectors




Furthermore, AMP connectors for 2-contact versions are available too. These connectors, specially developed for the automotive industry, are immune to vibration due to the quick coupling.


### High reliability contacts with "V" design

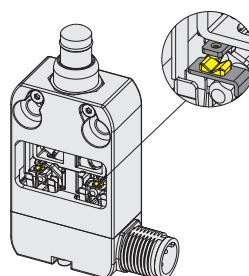


Articles with contact block C11, C02, C12, C22 are characterised by electrical contacts with a "V" design. This configuration reduces the possibility of error during operation and guarantees even more reliable contact switching, thanks to the contact points doubled compared to the flat-shaped contacts and the self-cleaning action of the contact. In the version with snap action contact, these articles are particularly suitable for use in the railway sector.

Selection diagram for item combinations of the NF series

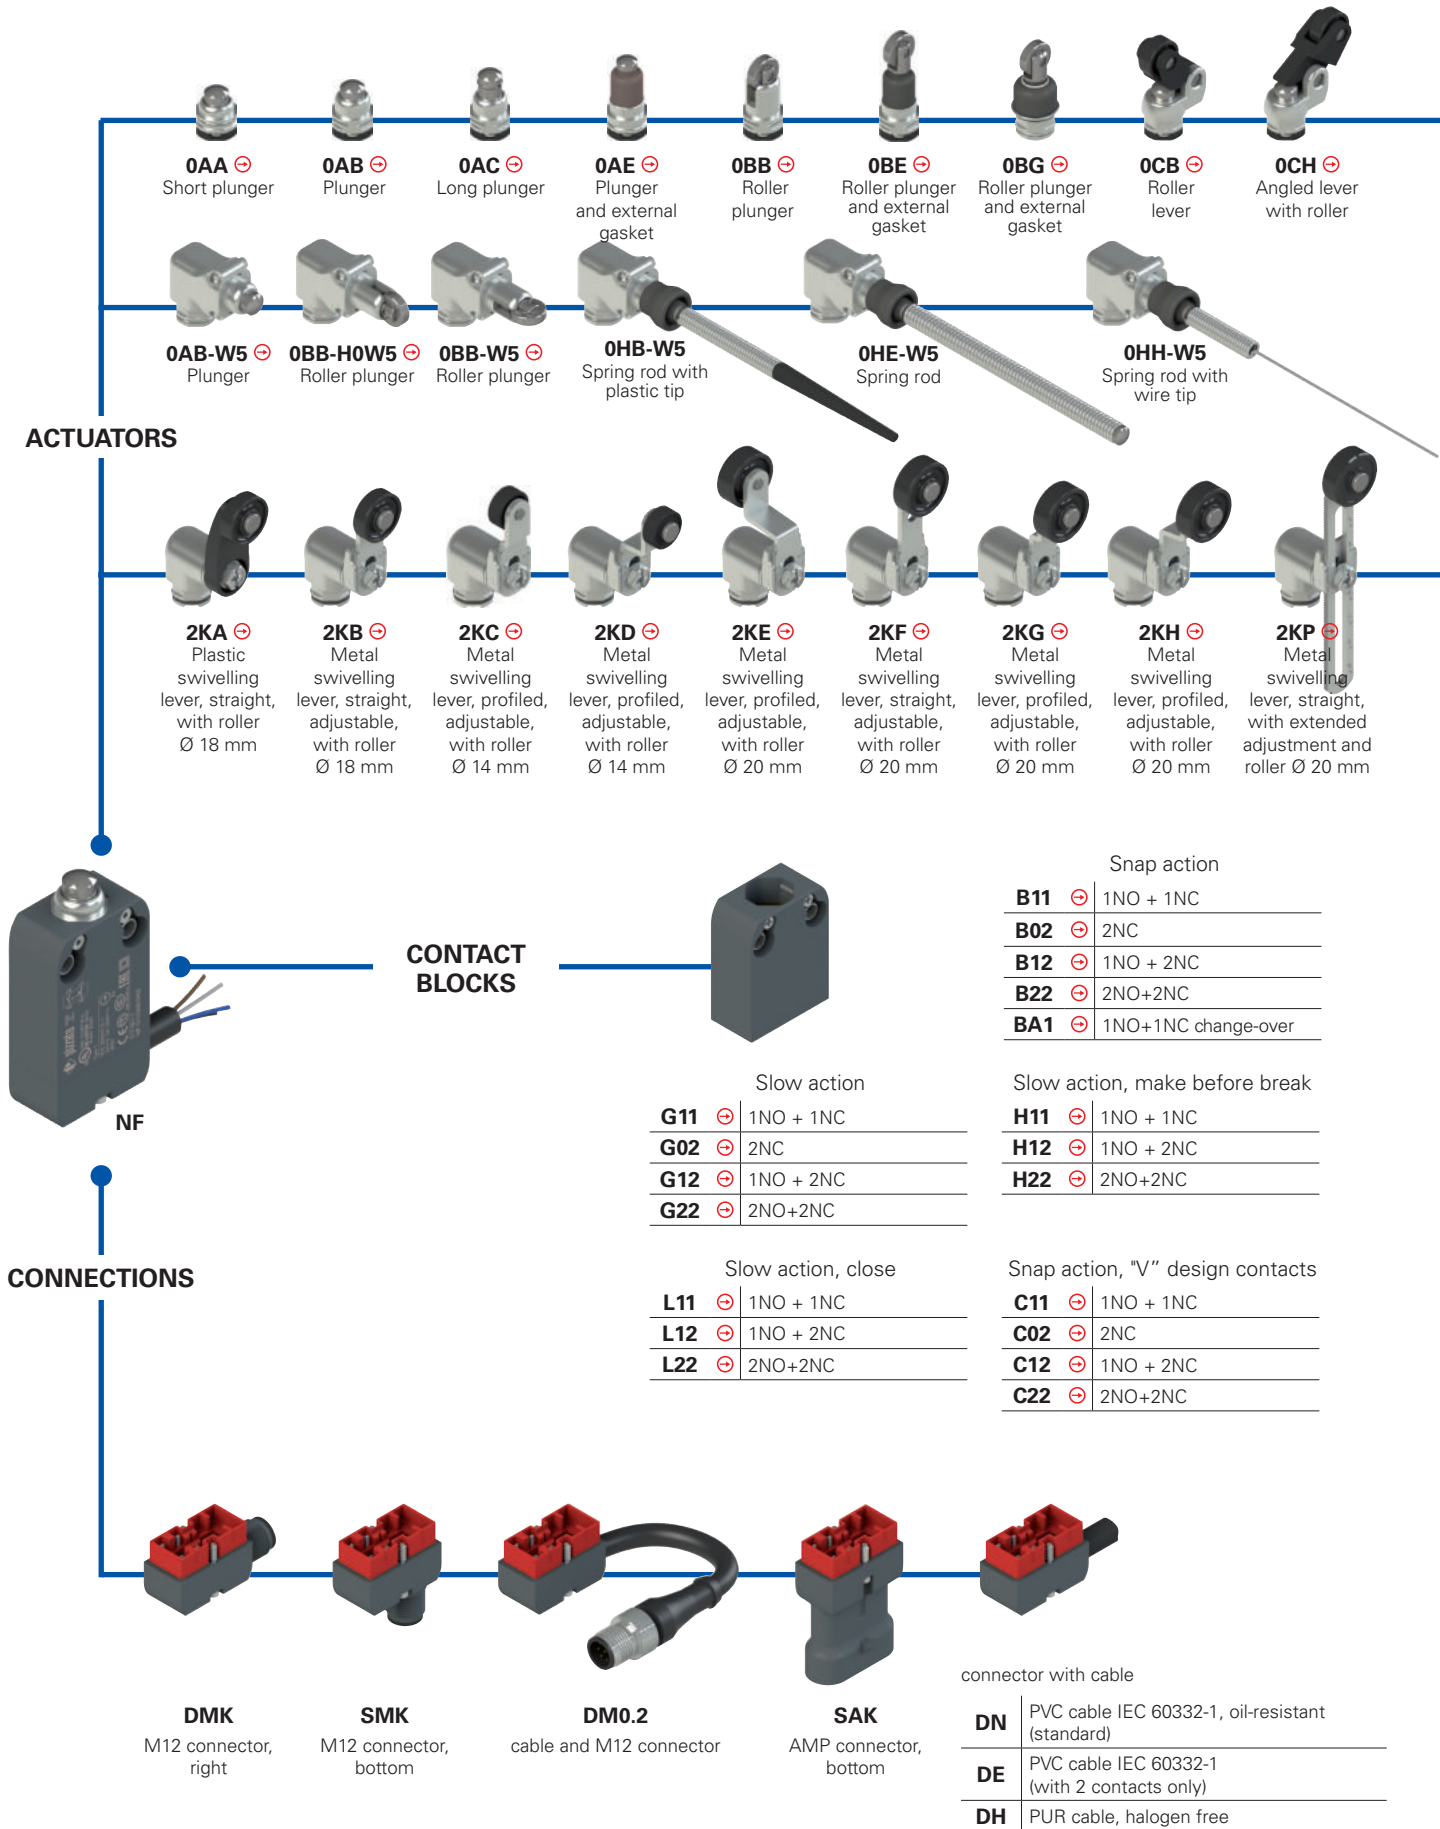

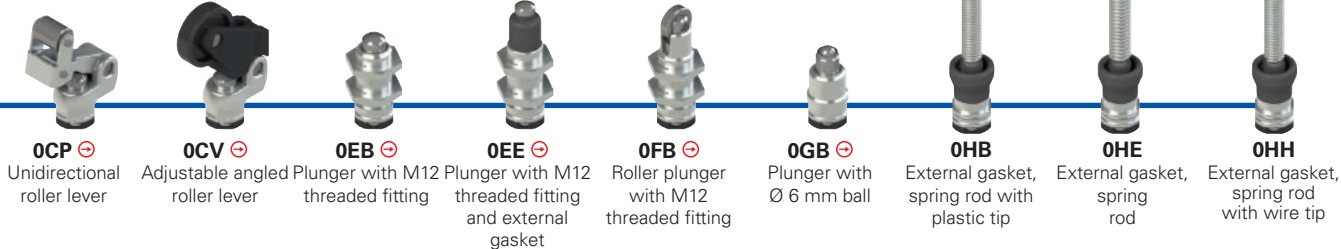

**OCP** ⊖ Unidirectional roller lever  
**OCV** ⊖ Adjustable angled roller lever  
**OEB** ⊖ Plunger with M12 threaded fitting  
**OEE** ⊖ Plunger with M12 threaded fitting and external gasket  
**OFB** ⊖ Roller plunger with M12 threaded fitting  
**OGB** ⊖ Plunger with Ø 6 mm ball  
**OHB** External gasket, spring rod with plastic tip  
**OHE** External gasket, spring rod  
**OHH** External gasket, spring rod with wire tip

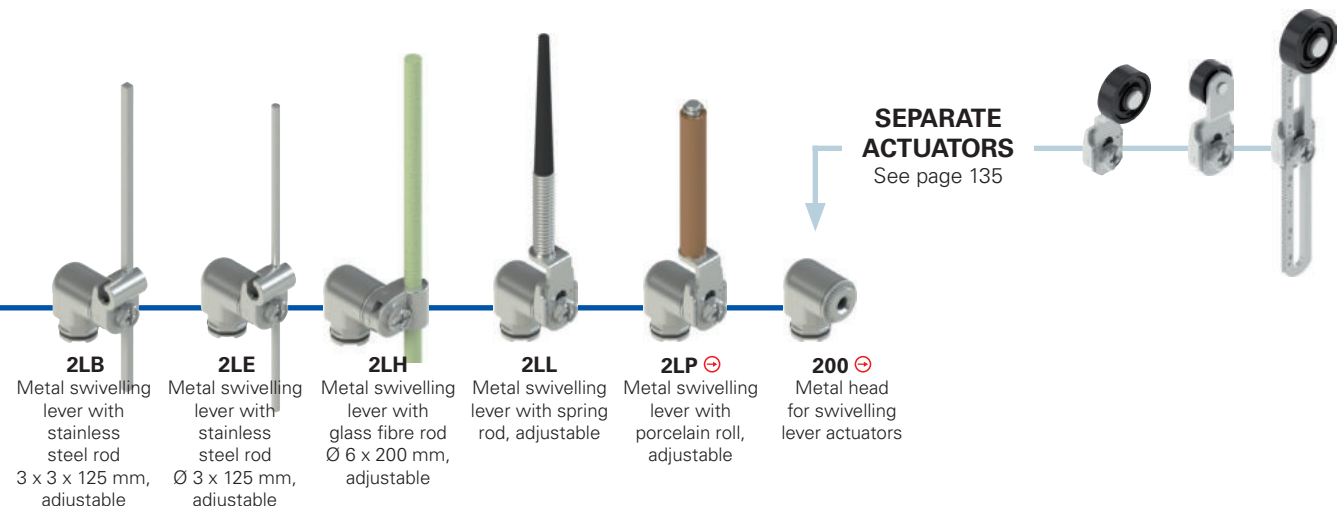

**2LB** Metal swivelling lever with stainless steel rod 3 x 3 x 125 mm, adjustable  
**2LE** Metal swivelling lever with stainless steel rod Ø 3 x 125 mm, adjustable  
**2LH** Metal swivelling lever with glass fibre rod Ø 6 x 200 mm, adjustable  
**2LL** Metal swivelling lever with spring rod, adjustable  
**2LP** ⊖ Metal swivelling lever with porcelain roll, adjustable  
**200** ⊖ Metal head for swivelling lever actuators

**SEPARATE ACTUATORS**  
See page 135



**Code structure**

**Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article options  
**NF B110AB-DN2 GR7T6W5**

**Housing**  
**NF** technopolymer, hole spacing 20 mm

Contact block	
<b>B11</b>	1NO+1NC, snap action (standard)
<b>B02</b>	2NC, snap action (standard)
<b>B12</b>	1NO+2NC, snap action (standard)
<b>B22</b>	2NO+2NC, snap action (standard)
<b>BA1</b>	1NO+1NC, snap action, change-over (available with M connector only)
<b>C11</b>	1NO+1NC, snap action, "V" design contacts
<b>C02</b>	2NC, snap action, "V" design contacts
<b>C12</b>	1NO+2NC, snap action, "V" design contacts
<b>C22</b>	2NO+2NC, snap action, "V" design contacts
<b>G11</b>	1NO+1NC, slow action (standard)
<b>G02</b>	2NC, slow action (standard)
<b>G12</b>	1NO+2NC, slow action (standard)
<b>G22</b>	2NO+2NC, slow action
<b>H11</b>	1NO+1NC, slow action, make before break
<b>H12</b>	1NO+2NC, slow action, make before break
<b>H22</b>	2NO+2NC, slow action, make before break
<b>L11</b>	1NO+1NC, slow action, close
<b>L12</b>	1NO+2NC, slow action, close
<b>L22</b>	2NO+2NC, slow action, close

Other contact blocks on request.

Actuator heads	
<b>0</b>	without head
<b>2</b>	head for swivelling lever actuators

Actuators	
<b>AA</b>	short plunger
<b>AB</b>	plunger
...	.....

Output direction	
<b>D</b>	cable or connector, right
<b>S</b>	connector, bottom

Redirection	
	without redirection
<b>W5</b>	90° redirection

Ambient temperature	
	-25°C ... +80°C (standard)
<b>T6</b>	-40 °C ... +80 °C


Rollers	
	standard roller
<b>R30</b>	stainless steel Ø 10.6 mm
<b>R29</b>	stainless steel Ø 13 mm
<b>R18</b>	technopolymer, Ø 14 mm
<b>R23</b>	stainless steel Ø 14 mm
<b>R36</b>	stainless steel Ø 16 mm
<b>R7</b>	technopolymer, Ø 18 mm
<b>R22</b>	technopolymer, Ø 20 mm
<b>R24</b>	stainless steel Ø 20 mm
<b>R19</b>	technopolymer, Ø 22 mm
<b>R25</b>	technopolymer, Ø 35 mm

Contact type	
	silver contacts (standard)
<b>G</b>	silver contacts with 1 µm gold coating <sup>(1)</sup>

<sup>(1)</sup> Not available for contact block C••

Connection type	
<b>0.2</b>	cable, length: 0.2 m with M12 connector (available for DM0.2 versions only)
<b>2</b>	cable, length: 2 m (standard)
<b>5</b>	cable, length 5 m (other cable lengths available on request)
<b>K</b>	integrated connector

Cable or connector type	
<b>N</b>	PVC cable IEC 60332-1, oil-resistant (standard)
<b>E</b>	PVC cable IEC 60332-1 (with 2 contacts only)
<b>H</b>	PUR cable, halogen free
<b>M</b>	M12 connector
<b>A</b>	AMP Superseal 1.5 connector

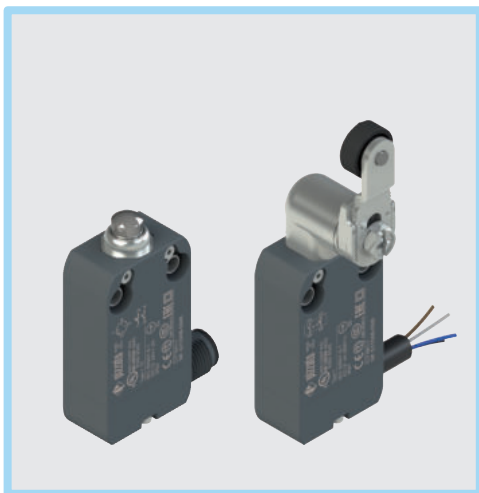

### Main features

- Technopolymer housing, right or bottom cable output
- Protection degrees IP67 and IP69K
- 2 types of integrated cable available
- Versions with M12 connector suitable for safety applications ⊕
- Versions with AMP connector
- 19 contact blocks available
- 37 actuators available

### Quality marks:



IMQ approval:	CA02.04562
UL approval:	E131787
CCC approval:	2020970305002292
EAC approval:	RU C-IT.YT03.B.00035/19

### Technical data

#### Housing

Housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation □.

Versions with integrated cable, standard length 2 m. Other lengths 0.5 ... 10 m or special cables available on request.

Versions with integrated M12 connector.

Versions with 0.2 m cable length and M12 connector, other lengths from 0.1 ... 3 m on request

Protection degree:	IP67 acc. to EN 60529
	IP69K acc. to ISO 20653 (Protect the cables from direct high-pressure and high-temperature jets)

Corrosion resistance in saline mist:	≥ 300 hours in NSS acc. to ISO 9227
--------------------------------------	-------------------------------------

#### General data

Ambient temperature for switches without cable: -25°C ... + 80°C (standard)  
-40°C ... + 80°C (T6 option)

Ambient temperature for switches with cable: See table on page 128

Max. actuation frequency: 3600 operating cycles/hour

Mechanical endurance:	
B••, G••, H••, L•• contact blocks:	20 million operating cycles
C•• contact block:	5 million operating cycles

Mounting position: any

Safety parameter  $B_{10D}$ : 40,000,000 for NC contacts

Mechanical interlock, not coded: type 1 acc. to EN ISO 14119

Tightening torques for installation: see page 233

#### Electrical data

Rated impulse withstand voltage ( $U_{imp}$ ):	4 kV
Conditional short circuit current:	1000 A acc. to EN 60947-5-1
Pollution degree:	3

#### In compliance with standards:

IEC 60947-5-1, EN 60947-5-1, IEC 60204-1, EN 60204-1, EN ISO 14119, EN ISO 12100, EN 60529, EN IEC 63000, ISO 20653, UL 508, CSA 22.2 No.14.

#### Compliance with the requirements of:

Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

#### Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

### ⚠ Installation for safety applications:

Use only switches marked with the symbol ⊕ next to the product code. Always connect the safety circuit to the **NC contacts** (normally closed contacts: see "Internal cable wiring" on page 128) as required by **EN ISO 14119, paragraph 5.4** for specific interlock applications and **EN ISO 13849-2 tables D3** (well-tries components) and **D.8** (failure exclusions) for safety applications in general. Actuate the switch **at least up to the positive opening travel** shown in the travel diagrams on page 234. Actuate the switch **at least with the positive opening force**, reported in brackets below each article, next to the actuating force value. All applicable standards must be respected too.

⚠ **If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 225 to 240.**

⚠ **Important: Switch off the circuit voltage before disconnecting the connector from the switch. The connector is not suitable for separation of electrical loads.**

### Features approved by IMQ

Rated insulation voltage ( $U_i$ ):	250 Vac
Conventional free air thermal current ( $I_{th}$ ):	10 A (1-2 contacts) / 6 A (2-3 contacts) / 4 A (4 contacts or 4-pole M12 connector)
Protection against short circuits (fuse):	10 A (1-2 contacts) / 6 A (2-3 contacts) / 4 A (4 contacts or 4-pole M12 connector) type gG
Rated impulse withstand voltage ( $U_{imp}$ ):	4 kV
Protection degree of the housing:	IP67 / IP69K
MA terminals (crimped terminals)	
Pollution degree:	3
Utilization category:	AC15 / DC13 (with connector)
Operating voltage ( $U_e$ ):	250 Vac (50 Hz) / 24 Vdc (with connector)
Operating current ( $I_o$ ):	3 A / 2 A (with connector)

Forms of the contact element: X, Y, X+Y, X+X, Y+Y, Y+Y+X, X+X+Y, X+X+Y+Y, Zb  
Positive opening of contacts on contact blocks B01, B11, B02, B12, B21, B22,  
G01, G11, G02, G12, G21, G22, L01, L11, L02, L12, L21, L22, H01, H11, H02, H12,  
H21, H22

In compliance with standards: EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.

Please contact our technical department for the list of approved products.

### Features approved by UL

Electrical Ratings:	R300 pilot duty (28 VA, 125 250 Vdc) B300 pilot duty (360 VA, 120 240 Vac) (1 cont.) B300 pilot duty (360 VA, 120 240 Vac) (2 - 3 cont. without connector) C300 pilot duty (180 VA, 120 240 Vac) (2 - 3 cont. with connector) C300 pilot duty (180 VA, 120 240 Vac) (4 cont.)
Environmental Ratings:	Types 1, 4X, 6, 12, 13 Types 1, 4X "indoor use only" (1 - 2 cont. with "E" type cable)
Screws torque of the detachable connector housing nominal is	0.2 ÷ 0.3 Nm.

Please contact our technical department for the list of approved products.




## Ambient temperatures for switches with cable and electrical data


Connection type	Output with cable						Output with M12 connector		Output with AMP connector
	2 contacts			3 contacts	4 contacts		2 contacts	3 or 4 contacts	2 contacts
Cable or connector type	E	N	H	N	N	H	M12 connector, 5-pole	M12 connector, 8-pole	AMP Superseal 1.5 connector
Conductors	4x0.75 mm <sup>2</sup>	4x0.75 mm <sup>2</sup>	4x0.75 mm <sup>2</sup>	6x0.5 mm <sup>2</sup>	8x0.34 mm <sup>2</sup>	8x0.34 mm <sup>2</sup>	4x0.34 mm <sup>2</sup>	8x0.25mm <sup>2</sup>	
Application field	General	General	General, mobile installation	General	General	General, mobile installation	General	General	General
In compliance with standards	H05VV-F	H05VV5-F	05EQ-H	03VV-F	03VV-F	03E7Q-H	03VV-H	03VV-H	/
Sheath	PVC	PVC OIL RESISTANT	PUR HALOGEN FREE	PVC OIL RESISTANT	PVC OIL RESISTANT	PUR HALOGEN FREE	PVC OIL RESISTANT	PVC OIL RESISTANT	/
Self-extinguishing	IEC 60332-1-2	IEC 60332-1-2 UL 758:FT1 CEI 20-22 II	IEC60332-1-2 UL 758:FT1	IEC 60332-1-2 UL 758:FT1 CEI 20-22 II	IEC 60332-1-2 UL 758:FT1 CEI 20-22 II	IEC 60332-1-2 UL 758:FT1 CEI 20-22 II	IEC60332-1-2 UL 758:FT1 CEI 20-22 II	IEC60332-1-2 UL 758:FT1 CEI 20-22 II	/
Oil resistant	/	UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210	UL 758 CSA 22.2 N°210	/
Max. speed	/	/	300 m/min	/	/	300 m/min	50 m/min	50 m/min	/
Max. acceleration	/	/	30 m/s <sup>2</sup>	/	/	30 m/s <sup>2</sup>	5 m/s <sup>2</sup>	5 m/s <sup>2</sup>	/
Minimum bending radius	70 mm	70 mm	70 mm	108 mm	108 mm	70 mm	75 mm	90 mm	/
Outer diameter	7 mm	7 mm	7 mm	7 mm	7 mm	7 mm	6 mm	6 mm	/
End stripped	80mm	80mm	80mm	80mm	80mm	80mm	/	/	/
Copper conductors IEC 60228	Class 5	Class 5	Class 6	Class 5	Class 5	Class 6	Class 6	Class 6	/
Engraving	Standard	6266	6279	6272	6276	6283	6263	6275	/

Ambient temperature with cable extended (T <sub>6</sub> ) standard	Cable, fixed installation	-15°C +60°C	-25°C +80°C	-25°C +80°C	-25°C +80°C	-25°C +80°C	-25°C +80°C	-25°C +80°C	-25°C +80°C	/	
	Cable, flexible installation	+5°C +60°C	-5°C +80°C	-25°C +80°C	-5°C +80°C	-5°C +80°C	-25°C +80°C	-15°C +80°C	-15°C +80°C	/	
	Cable, mobile installation	/	/	-25°C +80°C	/	/	-25°C +80°C	-15°C +80°C	-15°C +80°C	/	
	Cable, fixed installation	/	/	-40°C +80°C	/	/	-40°C +80°C	/	/	/	
	Cable, flexible installation	/	/	-40°C +80°C	/	/	-40°C +80°C	/	/	/	
	Cable, mobile installation	/	/	-40°C +80°C	/	/	-40°C +80°C	/	/	/	
Electrical data	Thermal current I <sub>th</sub>	10 A	10 A	10 A	6 A	3 A	3 A	4 A	2 A	10 A	
	Rated insulation voltage U <sub>i</sub>	250 Vac	250 Vac	250 Vac	250 Vac	250 Vac	250 Vac	250 Vac 300 Vdc	30 Vac 36 Vdc	250 Vac 300 Vdc	
	Protection against short circuits (fuse)	10 A 500 V type gG	10 A 500 V type gG	10 A 500 V type gG	6 A 500 V type gG	3 A 500 V type gG	3 A 500 V type gG	4 A 500 V type gG	2 A 500 V type gG	10 A 500 V type gG	
	Utilization category DC13	24 V	2 A	2 A	2 A	2 A	2 A	2 A	2 A	2 A	2 A
		125 V	0.4 A	0.4 A	0.4 A	0.4 A	0.4 A	0.4 A	0.4 A	/	0.4 A
		250 V	0.3 A	0.3 A	0.3 A	0.3 A	0.3 A	0.3 A	0.3 A	/	0.3 A
Utilization category AC15	24 V	4 A	4 A	4 A	4 A	3 A	3 A	4 A	2 A	4 A	
	120 V	4 A	4 A	4 A	4 A	3 A	3 A	4 A	/	4 A	
	250 V	4 A	4 A	4 A	4 A	3 A	3 A	4 A	/	4 A	
Approvals	CE cULus IMQ EAC CCC	CE cULus IMQ EAC CCC	CE cULus EAC	CE cULus IMQ EAC CCC	CE cULus IMQ EAC CCC	CE cULus EAC	CE cULus EAC	CE cULus IMQ EAC CCC	CE cULus EAC	CE cULus EAC CCC	

### Internal cable wiring




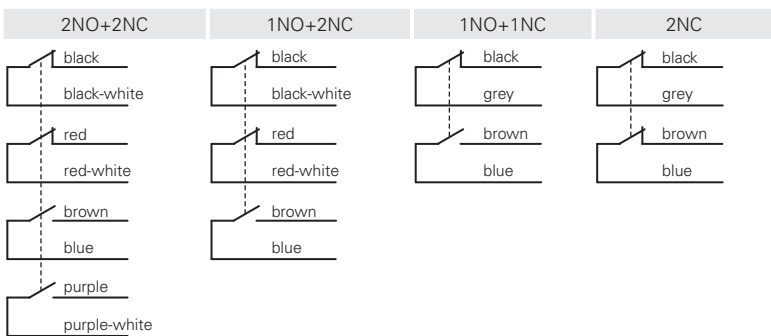


### Connector pin assignment

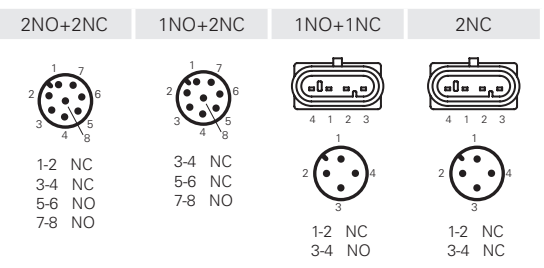

Female connectors see page 210





Contact type  
**R** = snap action  
**L** = slow action



Contact block

B11	<b>R</b>	NF B110AA-DN2	➔	1NO+1NC	NF B110AB-DN2	➔	1NO+1NC	NF B110AC-DN2	➔	1NO+1NC	NF B110AE-DN2	➔	1NO+1NC
B02	<b>R</b>	NF B020AA-DN2	➔	2NC	NF B020AB-DN2	➔	2NC	NF B020AC-DN2	➔	2NC	NF B020AE-DN2	➔	2NC
B12	<b>R</b>	NF B120AA-DN2	➔	1NO+2NC	NF B120AB-DN2	➔	1NO+2NC	NF B120AC-DN2	➔	1NO+2NC	NF B120AE-DN2	➔	1NO+2NC
B22	<b>R</b>	NF B220AA-DN2	➔	2NO+2NC	NF B220AB-DN2	➔	2NO+2NC	NF B220AC-DN2	➔	2NO+2NC	NF B220AE-DN2	➔	2NO+2NC
G11	<b>L</b>	NF G110AA-DN2	➔	1NO+1NC	NF G110AB-DN2	➔	1NO+1NC	NF G110AC-DN2	➔	1NO+1NC	NF G110AE-DN2	➔	1NO+1NC
G02	<b>L</b>	NF G020AA-DN2	➔	2NC	NF G020AB-DN2	➔	2NC	NF G020AC-DN2	➔	2NC	NF G020AE-DN2	➔	2NC
G12	<b>L</b>	NF G120AA-DN2	➔	1NO+2NC	NF G120AB-DN2	➔	1NO+2NC	NF G120AC-DN2	➔	1NO+2NC	NF G120AE-DN2	➔	1NO+2NC
G22	<b>L</b>	NF G220AA-DN2	➔	2NO+2NC	NF G220AB-DN2	➔	2NO+2NC	NF G220AC-DN2	➔	2NO+2NC	NF G220AE-DN2	➔	2NO+2NC
Max. speed		page 233 - type 4			page 233 - type 4			page 233 - type 4			page 233 - type 4		
Actuating force		7 N (25 N ➔)			7 N (25 N ➔)			7 N (25 N ➔)			7 N (25 N ➔)		
Travel diagrams		page 234 - group 1			page 234 - group 1			page 234 - group 1			page 234 - group 1		


Contact type  
**R** = snap action  
**L** = slow action




Contact block

B11	<b>R</b>	NF B110BB-DN2	➔	1NO+1NC	NF B110BE-DN2	➔	1NO+1NC	NF B110BG-DN2	➔	1NO+1NC	NF B110CB-DN2	➔	1NO+1NC
B02	<b>R</b>	NF B020BB-DN2	➔	2NC	NF B020BE-DN2	➔	2NC	NF B020BG-DN2	➔	2NC	NF B020CB-DN2	➔	2NC
B12	<b>R</b>	NF B120BB-DN2	➔	1NO+2NC	NF B120BE-DN2	➔	1NO+2NC	NF B120BG-DN2	➔	1NO+2NC	NF B120CB-DN2	➔	1NO+2NC
B22	<b>R</b>	NF B220BB-DN2	➔	2NO+2NC	NF B220BE-DN2	➔	2NO+2NC	NF B220BG-DN2	➔	2NO+2NC	NF B220CB-DN2	➔	2NO+2NC
G11	<b>L</b>	NF G110BB-DN2	➔	1NO+1NC	NF G110BE-DN2	➔	1NO+1NC	NF G110BG-DN2	➔	1NO+1NC	NF G110CB-DN2	➔	1NO+1NC
G02	<b>L</b>	NF G020BB-DN2	➔	2NC	NF G020BE-DN2	➔	2NC	NF G020BG-DN2	➔	2NC	NF G020CB-DN2	➔	2NC
G12	<b>L</b>	NF G120BB-DN2	➔	1NO+2NC	NF G120BE-DN2	➔	1NO+2NC	NF G120BG-DN2	➔	1NO+2NC	NF G120CB-DN2	➔	1NO+2NC
G22	<b>L</b>	NF G220BB-DN2	➔	2NO+2NC	NF G220BE-DN2	➔	2NO+2NC	NF G220BG-DN2	➔	2NO+2NC	NF G220CB-DN2	➔	2NO+2NC
Max. speed		page 233 - type 2			page 233 - type 5			page 233 - type 5			page 233 - type 3		
Actuating force		7 N (25 N ➔)			7 N (25 N ➔)			7 N (25 N ➔)			5 N (25 N ➔)		
Travel diagrams		page 234 - group 1			page 234 - group 1			page 234 - group 1			page 234 - group 2		


M12 connector, right

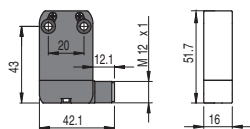

M12 connector, bottom



AMP Superseal 1.5 connector



To order a product with M12 right connector, replace DN2 with DMK in the codes shown above.  
 Example:  
 NF B110AA-DN2 → NF B110AA-DMK

To order a product with M12 bottom connector, replace DN2 with SMK in the codes shown above.  
 Example:  
 NF B110AA-DN2 → NF B110AA-SMK

To order a product with AMP connector, replace DN2 with SAK in the codes shown above. Example:  
 NF B110AA-DN2 → NF B110AA-SAK

All values in the drawings are in mm

Accessories See page 207


→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)



Contact type <b>R</b> = snap action <b>L</b> = slow action	With stainless steel roller on request	Unidirectional operation		Secured only by means of threaded head
Max. speed	page 233 - type 3	page 233 - type 3	page 233 - type 3	page 233 - type 4
Actuating force	5 N (25 N ⊕)	3 N (25 N ⊕)	3 N (25 N ⊕)	7 N (25 N ⊕)
Travel diagrams	page 234 - group 2	page 234 - group 6	page 234 - group 3	page 234 - group 1

Contact type <b>R</b> = snap action <b>L</b> = slow action	Secured only by means of threaded head External gasket	Secured only by means of threaded head	Plunger with Ø 6 mm ball	External gasket
Max. speed	page 233 - type 4	page 233 - type 2	page 233 - type 2	1 m/s
Actuating force	7 N (25 N ⊕)	7 N (25 N ⊕)	7 N (25 N ⊕)	0.03 Nm
Travel diagrams	page 234 - group 1	page 234 - group 1	page 234 - group 1	page 234 - group 4

Cable and M12 connector

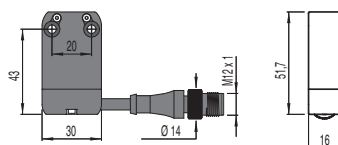


To order a product with cable and M12 connector:  
replace DN2 with DM0.2 in the codes shown above. Example:  
NF B110AA-DN2 → NF B110AA-DM0.2



Contact type <b>R</b> = snap action <b>L</b> = slow action	External gasket		External gasket		With stainless steel roller on request		With stainless steel roller on request	
Contact block								
B11 <b>R</b>	NF B110HE-DN2	1NO+1NC	NF B110HH-DN2	1NO+1NC	NF B112KA-DN2	1NO+1NC	NF B112KB-DN2	1NO+1NC
B02 <b>R</b>	NF B020HE-DN2	2NC	NF B020HH-DN2	2NC	NF B022KA-DN2	2NC	NF B022KB-DN2	2NC
B12 <b>R</b>	NF B120HE-DN2	1NO+2NC	NF B120HH-DN2	1NO+2NC	NF B122KA-DN2	1NO+2NC	NF B122KB-DN2	1NO+2NC
B22 <b>R</b>	NF B220HE-DN2	2NO+2NC	NF B220HH-DN2	2NO+2NC	NF B222KA-DN2	2NO+2NC	NF B222KB-DN2	2NO+2NC
G11 <b>L</b>	/	/	/	/	NF G112KA-DN2	1NO+1NC	NF G112KB-DN2	1NO+1NC
G02 <b>L</b>	NF G020HE-DN2	2NC	NF G020HH-DN2	2NC	NF G022KA-DN2	2NC	NF G022KB-DN2	2NC
G12 <b>L</b>	/	/	/	/	NF G122KA-DN2	1NO+2NC	NF G122KB-DN2	1NO+2NC
G22 <b>L</b>	/	/	/	/	NF G222KA-DN2	2NO+2NC	NF G222KB-DN2	2NO+2NC
Max. speed	1 m/s		1 m/s		page 233 - type 1		page 233 - type 1	
Actuating force	0.07 Nm		0.03 Nm		0.07 Nm (0.25 Nm)		0.07 Nm (0.25 Nm)	
Travel diagrams	page 234 - group 4		page 234 - group 4		page 234 - group 5		page 234 - group 5	


Contact type <b>R</b> = snap action <b>L</b> = slow action	With stainless steel roller on request		With stainless steel roller on request		With stainless steel roller on request		With stainless steel roller on request	
Contact block								
B11 <b>R</b>	NF B112KC-DN2	1NO+1NC	NF B112KD-DN2	1NO+1NC	NF B112KE-DN2	1NO+1NC	NF B112KF-DN2	1NO+1NC
B02 <b>R</b>	NF B022KC-DN2	2NC	NF B022KD-DN2	2NC	NF B022KE-DN2	2NC	NF B022KF-DN2	2NC
B12 <b>R</b>	NF B122KC-DN2	1NO+2NC	NF B122KD-DN2	1NO+2NC	NF B122KE-DN2	1NO+2NC	NF B122KF-DN2	1NO+2NC
B22 <b>R</b>	NF B222KC-DN2	2NO+2NC	NF B222KD-DN2	2NO+2NC	NF B222KE-DN2	2NO+2NC	NF B222KF-DN2	2NO+2NC
G11 <b>L</b>	NF G112KC-DN2	1NO+1NC	NF G112KD-DN2	1NO+1NC	NF G112KE-DN2	1NO+1NC	NF G112KF-DN2	1NO+1NC
G02 <b>L</b>	NF G022KC-DN2	2NC	NF G022KD-DN2	2NC	NF G022KE-DN2	2NC	NF G022KF-DN2	2NC
G12 <b>L</b>	NF G122KC-DN2	1NO+2NC	NF G122KD-DN2	1NO+2NC	NF G122KE-DN2	1NO+2NC	NF G122KF-DN2	1NO+2NC
G22 <b>L</b>	NF G222KC-DN2	2NO+2NC	NF G222KD-DN2	2NO+2NC	NF G222KE-DN2	2NO+2NC	NF G222KF-DN2	2NO+2NC
Max. speed	page 233 - type 1		page 233 - type 1		page 233 - type 1		page 233 - type 1	
Actuating force	0.07 Nm (0.25 Nm)		0.07 Nm (0.25 Nm)		0.07 Nm (0.25 Nm)		0.07 Nm (0.25 Nm)	
Travel diagrams	page 234 - group 5		page 234 - group 5		page 234 - group 5		page 234 - group 5	

M12 connector, right

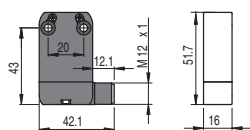


To order a product with M12 right connector, replace DN2 with DMK in the codes shown above.  
Example:  
NF B110AA-DN2 → NF B110AA-DMK

M12 connector, bottom



To order a product with M12 bottom connector, replace DN2 with SMK in the codes shown above.  
Example:  
NF B110AA-DN2 → NF B110AA-SMK

AMP Superseal 1.5 connector



To order a product with AMP connector, replace DN2 with SAK in the codes shown above. Example:  
NF B110AA-DN2 → NF B110AA-SAK




Contact type  
**R** = snap action  
**L** = slow action

	With stainless steel roller on request	With stainless steel roller on request	With stainless steel roller on request	Square rod, 3x3 mm, stainless steel
Contact block				
B11 <b>R</b>	NF B112KG-DN2  1NO+1NC	NF B112KH-DN2  1NO+1NC	NF B112KP-DN2  1NO+1NC	NF B112LB-DN2 1NO+1NC
B02 <b>R</b>	NF B022KG-DN2  2NC	NF B022KH-DN2  2NC	NF B022KP-DN2  2NC	NF B022LB-DN2 2NC
B12 <b>R</b>	NF B122KG-DN2  1NO+2NC	NF B122KH-DN2  1NO+2NC	NF B122KP-DN2  1NO+2NC	NF B122LB-DN2 1NO+2NC
B22 <b>R</b>	NF B222KG-DN2  2NO+2NC	NF B222KH-DN2  2NO+2NC	NF B222KP-DN2  2NO+2NC	NF B222LB-DN2 2NO+2NC
G11 <b>L</b>	NF G112KG-DN2  1NO+1NC	NF G112KH-DN2  1NO+1NC	NF G112KP-DN2  1NO+1NC	NF G112LB-DN2 1NO+1NC
G02 <b>L</b>	NF G022KG-DN2  2NC	NF G022KH-DN2  2NC	NF G022KP-DN2  2NC	NF G022LB-DN2 2NC
G12 <b>L</b>	NF G122KG-DN2  1NO+2NC	NF G122KH-DN2  1NO+2NC	NF G122KP-DN2  1NO+2NC	NF G122LB-DN2 1NO+2NC
G22 <b>L</b>	NF G222KG-DN2  2NO+2NC	NF G222KH-DN2  2NO+2NC	NF G222KP-DN2  2NO+2NC	NF G222LB-DN2 2NO+2NC
Max. speed	page 233 - type 1	page 233 - type 1	page 233 - type 1	1.5 m/s
Actuating force	0.07 Nm (0.25 Nm )	0.07 Nm (0.25 Nm )	0.07 Nm (0.25 Nm )	0.07 Nm
Travel diagrams	page 234 - group 5	page 234 - group 5	page 234 - group 5	page 234 - group 5










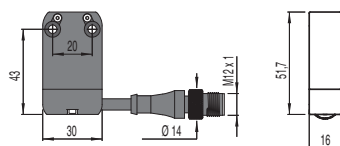





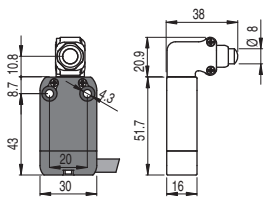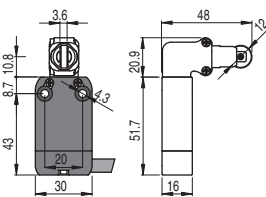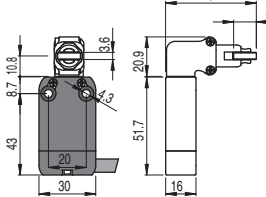
























Contact type  
**R** = snap action  
**L** = slow action














	Round rod, Ø 3 mm, stainless steel	Glass fibre rod		Porcelain roller
Contact block				
B11 <b>R</b>	NF B112LE-DN2 1NO+1NC	NF B112LH-DN2 1NO+1NC	NF B112LL-DN2 1NO+1NC	NF B112LP-DN2E24  1NO+1NC
B02 <b>R</b>	NF B022LE-DN2 2NC	NF B022LH-DN2 2NC	NF B022LL-DN2 2NC	NF B022LP-DN2E24  2NC
B12 <b>R</b>	NF B122LE-DN2 1NO+2NC	NF B122LH-DN2 1NO+2NC	NF B122LL-DN2 1NO+2NC	NF B122LP-DN2E24  1NO+2NC
B22 <b>R</b>	NF B222LE-DN2 2NO+2NC	NF B222LH-DN2 2NO+2NC	NF B222LL-DN2 2NO+2NC	NF B222LP-DN2E24  2NO+2NC
G11 <b>L</b>	NF G112LE-DN2 1NO+1NC	NF G112LH-DN2 1NO+1NC	NF G112LL-DN2 1NO+1NC	NF G112LP-DN2E24  1NO+1NC
G02 <b>L</b>	NF G022LE-DN2 2NC	NF G022LH-DN2 2NC	NF G022LL-DN2 2NC	NF G022LP-DN2E24  2NC
G12 <b>L</b>	NF G122LE-DN2 1NO+2NC	NF G122LH-DN2 1NO+2NC	NF G122LL-DN2 1NO+2NC	NF G122LP-DN2E24  1NO+2NC
G22 <b>L</b>	NF G222LE-DN2 2NO+2NC	NF G222LH-DN2 2NO+2NC	NF G222LL-DN2 2NO+2NC	NF G222LP-DN2E24  2NO+2NC
Max. speed	1.5 m/s	1.5 m/s	1.5 m/s	0.5 m/s
Actuating force	0.07 Nm	0.07 Nm	0.07 Nm	0.04 Nm
Travel diagrams	page 234 - group 5	page 234 - group 5	page 234 - group 5	page 234 - group 5

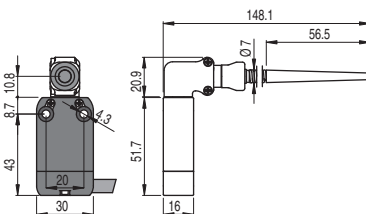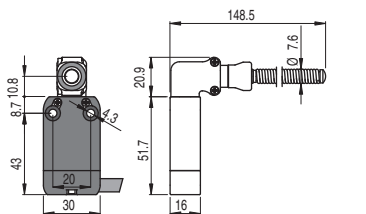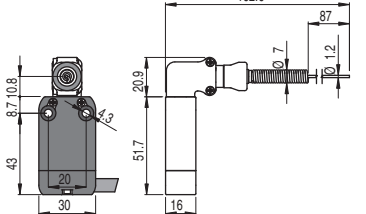Cable and M12 connector




To order a product with cable and M12 connector:  
 replace DN2 with DM0.2 in the codes shown above. Example:  
 NF B110AA-DN2 → NF B110AA-DM0.2

Contact type						
 = snap action  = slow action						
						
						
Contact block						
B11	 NF B110AB-DN2W5	 1NO+1NC	NF B110BB-DN2H0W5	 1NO+1NC	NF B110BB-DN2W5	 1NO+1NC
B02	 NF B020AB-DN2W5	 2NC	NF B020BB-DN2H0W5	 2NC	NF B020BB-DN2W5	 2NC
B12	 NF B120AB-DN2W5	 1NO+2NC	NF B120BB-DN2H0W5	 1NO+2NC	NF B120BB-DN2W5	 1NO+2NC
B22	 NF B220AB-DN2W5	 2NO+2NC	NF B220BB-DN2H0W5	 2NO+2NC	NF B220BB-DN2W5	 2NO+2NC
G11	 NF G110AB-DN2W5	 1NO+1NC	NF G110BB-DN2H0W5	 1NO+1NC	NF G110BB-DN2W5	 1NO+1NC
G02	 NF G020AB-DN2W5	 2NC	NF G020BB-DN2H0W5	 2NC	NF G020BB-DN2W5	 2NC
G12	 NF G120AB-DN2W5	 1NO+2NC	NF G120BB-DN2H0W5	 1NO+2NC	NF G120BB-DN2W5	 1NO+2NC
G22	 NF G220AB-DN2W5	 2NO+2NC	NF G220BB-DN2H0W5	 2NO+2NC	NF G220BB-DN2W5	 2NO+2NC
Max. speed	page 233 - type 4		page 233 - type 2		page 233 - type 2	
Actuating force	9.5 N (25 N  )		9.5 N (25 N  )		9.5 N (25 N  )	
Travel diagrams	page 234 - group 1		page 234 - group 1		page 234 - group 1	


Contact type		External gasket		External gasket		External gasket	
 = snap action  = slow action							
							
Contact block							
B11	 NF B110HB-DN2W5	1NO+1NC	NF B110HE-DN2W5	1NO+1NC	NF B110HH-DN2W5	1NO+1NC	
B02	 NF B020HB-DN2W5	2NC	NF B020HE-DN2W5	2NC	NF B020HH-DN2W5	2NC	
B12	 NF B120HB-DN2W5	1NO+2NC	NF B120HE-DN2W5	1NO+2NC	NF B120HH-DN2W5	1NO+2NC	
B22	 NF B220HB-DN2W5	2NO+2NC	NF B220HE-DN2W5	2NO+2NC	NF B220HH-DN2W5	2NO+2NC	
G11	 /	/	/	/	/	/	
G02	 NF G020HB-DN2W5	2NC	NF G020HE-DN2W5	2NC	NF G020HH-DN2W5	2NC	
G12	 /	/	/	/	/	/	
G22	 /	/	/	/	/	/	
Max. speed	1 m/s		1 m/s		1 m/s		
Actuating force	0.08 Nm		0.12 Nm		0.08 Nm		
Travel diagrams	page 234 - group 4		page 234 - group 4		page 234 - group 4		

M12 connector, right




To order a product with M12 right connector, replace DN2 with DMK in the codes shown above.  
 Example:  
 NF B110AA-DN2 → NF B110AA-DMK

M12 connector, bottom



To order a product with M12 bottom connector, replace DN2 with SMK in the codes shown above.  
 Example:  
 NF B110AA-DN2 → NF B110AA-SMK


AMP Superseal 1.5 connector




To order a product with AMP connector, replace DN2 with SAK in the codes shown above. Example:  
 NF B110AA-DN2 → NF B110AA-SAK

**Accessories** Packs of **10 pcs.**

Article	Description
VN DT1F	Spacer for NA and NF series



By installing spacers between two switches, it is possible to have 2 or more pre-wired switches, preventing them from slipping.


**M12 female connectors with cable** For details see page 210

**General data**

- Polyurethane connector body
- Class 6 copper conductors acc. to IEC 60228 - mobile installation
- Gold-plated contacts
- Self-locking ring nut made of nickel-plated brass, available on request in AISI 316L stainless steel hex version.
- High flexibility cable with oil resistant PVC or PUR sheath suitable to be used in drag chains, acc. to IEC 60332-1-2

**Code structure** **Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article
options  
**VF CA4PD3M-X**

No. of poles	
<b>4</b>	4 poles
<b>5</b>	5 poles
<b>8</b>	8 poles
<b>12</b>	12 poles

Cable sheath	
<b>P</b>	PVC (standard)
<b>U</b>	PUR

Connector type	
<b>D</b>	straight (standard)
<b>G</b>	angled

Connection type		Fixing ring	
<b>M</b>	M12x1		cylindrical ring nut (standard)
		<b>X</b>	stainless steel hex ring nut

Cable length (L)		4 poles				5 poles				8 poles				12 poles			
		1	2	3	4	1	2	3	4	1	2	3	4	1	2	3	4
<b>1</b>	1 metre																
<b>2</b>	2 metres																
<b>3</b>	3 metres (standard)			•	•												
<b>4</b>	4 metres																
<b>5</b>	5 metres (standard)			•	•	•	•	•	•								
<b>...</b>																	
<b>0</b>	10 metres (standard)			•	•	•	•	•	•								

Other lengths on request

**Stock items**

- VF CA4PD3M
- VF CA4PD5M
- VF CA4PD0M
- VF CA5PD3M
- VF CA5PD5M
- VF CA5PD0M
- VF CA8PD5M
- VF CA8PD0M
- VF CA12PD5M
- VF CA12PD0M
- VF CA8UD5M-X
- VF CA8UD0M-X
- VF CA12UD0M-X

**Attention!** For items not in stock the minimum order quantity is 100 pcs.

**Field wireable M12 female connectors**

**General data**

Technopolymer connector body  
 Gold-plated contacts  
 Screw terminals for cable screw fittings

Max. operating voltages      250 Vac/dc (4 and 5-pole)  
    30 Vac/dc (8-pole)

Maximum current                4 A (4 and 5-pole)  
    2 A (8-pole)

Protection degree                IP67 acc. to EN 60529

Ambient temperature            -25°C ... +85°C


Wire cross-section                0.25 mm<sup>2</sup> (23 AWG) ... 0.5 mm<sup>2</sup> (20 AWG)

Tightening torque:                0.6 ... 0.8 Nm

Article	Description	no. of poles
VF CBMP4DM04	Field wireable M12 female connector, straight, for Ø 4 ... Ø 6.5 mm multipolar cables	4
VF CBMP5DM04	Field wireable M12 female connector, straight, for Ø 4 ... Ø 6.5 mm multipolar cables	5
VF CBMP8DM04	Field wireable M12 female connector, straight, for Ø 4 ... 7 mm multipolar cables	8

→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)


Selection diagram for item combinations of the NA, NB, NF series

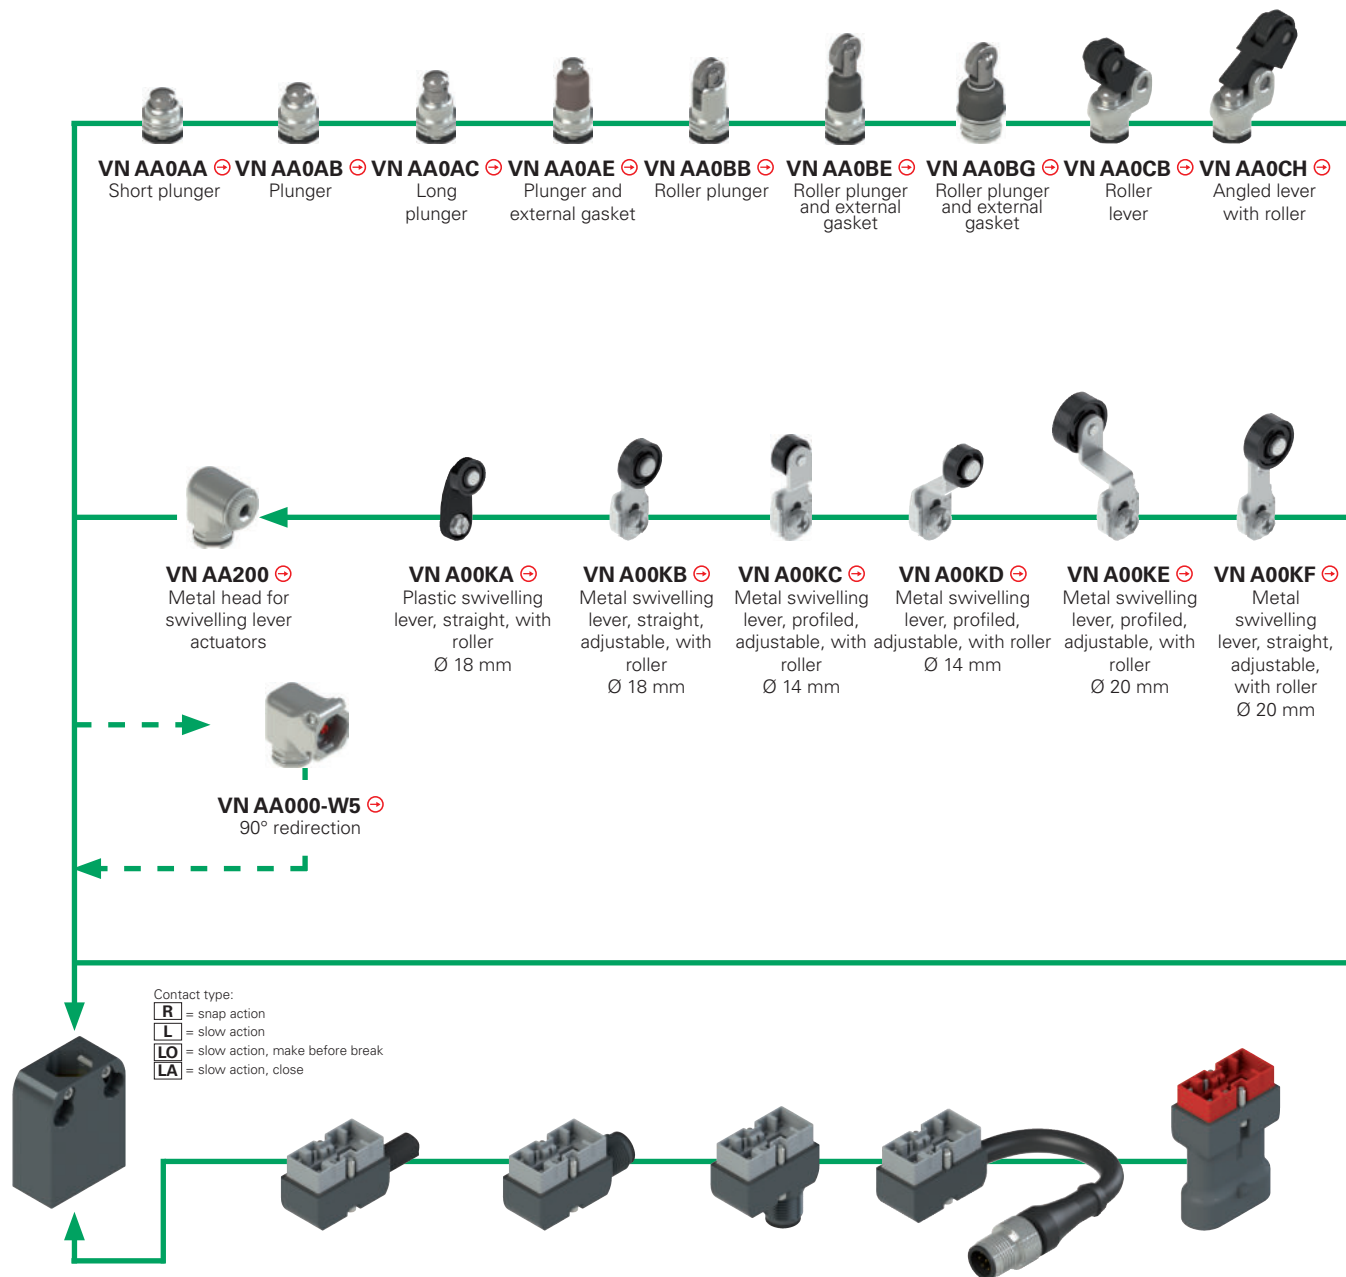

METAL housing, NA hole spacing 20 mm	Metal connector with cable	Cable length (m)	M12 metal connector, right	M12 metal connector, bottom	Metal connector with cable and M12 connector	Cable length (m)	AMP technopolymer connector, bottom
NA B11000 ⊕ 1NO+1NC <b>R</b>	VN CM11DN2	2	VN CM11DMK	VN CM11SMK	VN CM11DM0.2	0.2	VN CM11SAK
NA G11000 ⊕ 1NO+1NC <b>L</b>		5					
NA L11000 ⊕ 1NO+1NC <b>LA</b>	VN CM11DN5	2	VN CM11DMK	VN CM11SMK	VN CM11DM0.2	0.2	VN CM11SAK
NA H11000 ⊕ 1NO+1NC <b>LO</b>		5					
NA B02000 ⊕ 2NC <b>R</b>	VN CM02DN2	2	VN CM02DMK	VN CM02SMK	VN CM02DM0.2	0.2	VN CM02SAK
NA G02000 ⊕ 2NC <b>L</b>		5					
NA B20000 ⊕ 2NO <b>R</b>	VN CM20DN2	2	VN CM20DMK	VN CM20SMK	VN CM20DM0.2	0.2	VN CM20SAK
NA G20000 ⊕ 2NO <b>L</b>		5					
NA B12000 ⊕ 1NO+2NC <b>R</b>	VN CM12DN2	2	VN CM12DMK	VN CM12SMK	VN CM12DM0.2	0.2	VN CM12SAK
NA G12000 ⊕ 1NO+2NC <b>L</b>		5					
NA L12000 ⊕ 1NO+2NC <b>LA</b>	VN CM12DN5	2	VN CM12DMK	VN CM12SMK	VN CM12DM0.2	0.2	VN CM12SAK
NA H12000 ⊕ 1NO+2NC <b>LO</b>		5					
NA B22000 ⊕ 2NO+2NC <b>R</b>	VN CM22DN2	2	VN CM22DMK	VN CM22SMK	VN CM22DM0.2	0.2	VN CM22SAK
NA G22000 ⊕ 2NO+2NC <b>L</b>		5					
NA L22000 ⊕ 2NO+2NC <b>LA</b>	VN CM22DN5	2	VN CM22DMK	VN CM22SMK	VN CM22DM0.2	0.2	VN CM22SAK
NA H22000 ⊕ 2NO+2NC <b>LO</b>		5					

To order a NB series housing, replace NA with NB in the codes shown above. Example: NA B11000 → NB B11000


⚠ It is not allowed to install VN CM\*\*\*\*\* connectors on technopolymer housings

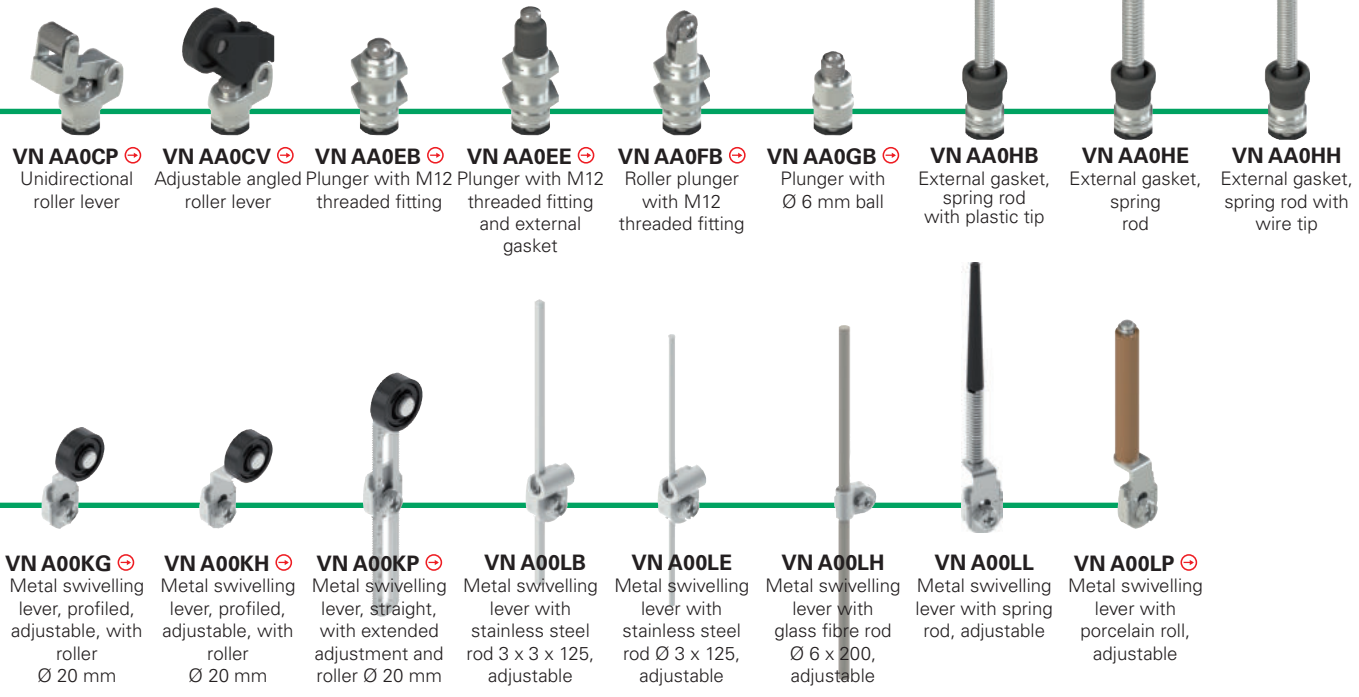

**VN AA0CP** ⊕ Unidirectional roller lever  
**VN AA0CV** ⊕ Adjustable angled roller lever  
**VN AA0EB** ⊕ Plunger with M12 threaded fitting  
**VN AA0EE** ⊕ Plunger with M12 threaded fitting and external gasket  
**VN AA0FB** ⊕ Roller plunger with M12 threaded fitting  
**VN AA0GB** ⊕ Plunger with Ø 6 mm ball  
**VN AA0HB** External gasket, spring rod with plastic tip  
**VN AA0HE** External gasket, spring rod  
**VN AA0HH** External gasket, spring rod with wire tip

**VN A00KG** ⊕ Metal swivelling lever, profiled, adjustable, with roller Ø 20 mm  
**VN A00KH** ⊕ Metal swivelling lever, profiled, adjustable, with roller Ø 20 mm  
**VN A00KP** ⊕ Metal swivelling lever, straight, with extended adjustment and roller Ø 20 mm  
**VN A00LB** Metal swivelling lever with stainless steel rod 3 x 3 x 125, adjustable  
**VN A00LE** Metal swivelling lever with stainless steel rod Ø 3 x 125, adjustable  
**VN A00LH** Metal swivelling lever with glass fibre rod Ø 6 x 200, adjustable  
**VN A00LL** Metal swivelling lever with spring rod, adjustable  
**VN A00LP** ⊕ Metal swivelling lever with porcelain roll, adjustable

Contact type:  
**R** = snap action  
**L** = slow action  
**LO** = slow action, make before break  
**LA** = slow action, close



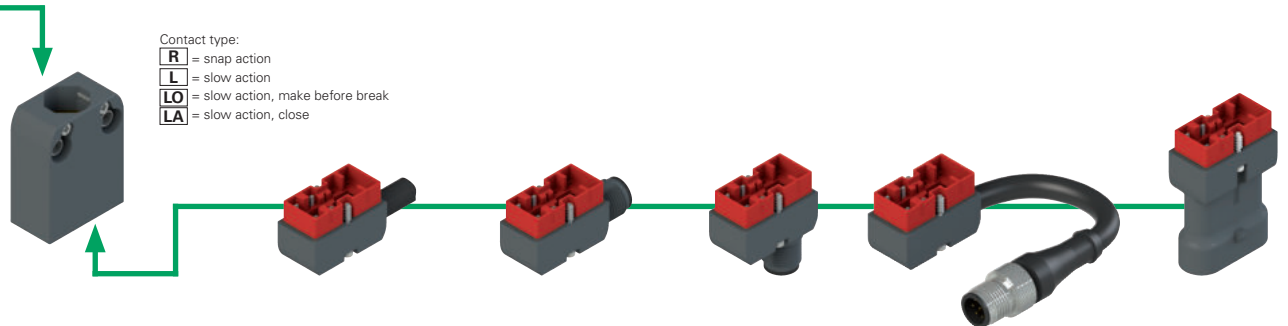


NFTECHNOPOLYMER housing, 20 mm hole spacing	Technopolymer connector with cable	Cable length (m)	M12 technopolymer connector, right	M12 technopolymer connector, bottom	Technopolymer connector with cable and M12 connector	Cable length (m)	AMP technopolymer connector, bottom
NF B11000 ⊕ 1NO+1NC <b>R</b>	VN CP11DN2	2	VN CP11DMK	VN CP11SMK	VN CP11DM0.2	0.2	VN CP11SAK
NF G11000 ⊕ 1NO+1NC <b>L</b>	VN CP11DN5	5					
NF L11000 ⊕ 1NO+1NC <b>LA</b>	VN CP02DN2	2	VN CP02DMK	VN CP02SMK	VN CP02DM0.2	0.2	VN CP02SAK
NF H11000 ⊕ 1NO+1NC <b>LO</b>	VN CP02DN5	5					
NF B02000 ⊕ 2NC <b>R</b>	VN CP20DN2	2	VN CP20DMK	VN CP20SMK	VN CP20DM0.2	0.2	VN CP20SAK
NF G02000 ⊕ 2NC <b>L</b>	VN CP20DN5	5					
NF B20000 ⊕ 2NO <b>R</b>	VN CP12DN2	2	VN CP12DMK	VN CP12SMK	VN CP12DM0.2	0.2	
NF G20000 ⊕ 2NO <b>L</b>	VN CP12DN5	5					
NF B12000 ⊕ 1NO+2NC <b>R</b>	VN CP22DN2	2	VN CP22DMK	VN CP22SMK	VN CP22DM0.2	0.2	
NF G12000 ⊕ 1NO+2NC <b>L</b>	VN CP22DN5	5					
NF L20000 ⊕ 2NO+2NC <b>LA</b>							
NF H20000 ⊕ 2NO+2NC <b>LO</b>							

⚠ It is not allowed to install VN CP\*\*\*\*\* connectors on metal housings

## Housings



Contact type:  
**R** = snap action  
**L** = slow action  
**LO** = slow action, make before break  
**LA** = slow action, close

	NA metal housings	NB metal housings	NF technopolymer housings
			
<b>R</b>	NA B11000 ⊕ 1NO+1NC	NB B11000 ⊕ 1NO+1NC	NF B11000 ⊕ 1NO+1NC
<b>L</b>	NA G11000 ⊕ 1NO+1NC	NB G11000 ⊕ 1NO+1NC	NF G11000 ⊕ 1NO+1NC
<b>LA</b>	NA L11000 ⊕ 1NO+1NC	NB L11000 ⊕ 1NO+1NC	NF L11000 ⊕ 1NO+1NC
<b>LO</b>	NA H11000 ⊕ 1NO+1NC	NB H11000 ⊕ 1NO+1NC	NF H11000 ⊕ 1NO+1NC
<b>R</b>	NA B12000 ⊕ 1NO+2NC	NB B12000 ⊕ 1NO+2NC	NF B12000 ⊕ 1NO+2NC
<b>L</b>	NA G12000 ⊕ 1NO+2NC	NB G12000 ⊕ 1NO+2NC	NF G12000 ⊕ 1NO+2NC
<b>LA</b>	NA L12000 ⊕ 1NO+2NC	NB L12000 ⊕ 1NO+2NC	NF L12000 ⊕ 1NO+2NC
<b>LO</b>	NA H12000 ⊕ 1NO+2NC	NB H12000 ⊕ 1NO+2NC	NF H12000 ⊕ 1NO+2NC
<b>R</b>	NA B22000 ⊕ 2NO+2NC	NB B22000 ⊕ 2NO+2NC	NF B22000 ⊕ 2NO+2NC
<b>L</b>	NA G22000 ⊕ 2NO+2NC	NB G22000 ⊕ 2NO+2NC	NF G22000 ⊕ 2NO+2NC
<b>LA</b>	NA L22000 ⊕ 2NO+2NC	NB L22000 ⊕ 2NO+2NC	NF L22000 ⊕ 2NO+2NC
<b>LO</b>	NA H22000 ⊕ 2NO+2NC	NB H22000 ⊕ 2NO+2NC	NF H22000 ⊕ 2NO+2NC

Quality marks:









## Connectors with cable

Cable type	Length (m)	metal connectors for NA and NB housings	technopolymer connectors for NF housings
			
N PVC	2	VN CM11DN2 1NO+1NC	VN CP11DN2 1NO+1NC
	5	VN CM11DN5 1NO+1NC	VN CP11DN5 1NO+1NC
	2	VN CM12DN2 1NO+2NC	VN CP12DN2 1NO+2NC
	5	VN CM12DN5 1NO+2NC	VN CP12DN5 1NO+2NC
H PUR halogen free	2	VN CM22DN2 2NO+2NC	VN CP22DN2 2NO+2NC
	5	VN CM22DN5 2NO+2NC	VN CP22DN5 2NO+2NC
	2	VN CM11DH2 1NO+1NC	VN CP11DH2 1NO+1NC
	5	VN CM11DH5 1NO+1NC	VN CP11DH5 1NO+1NC
	2	VN CM12DH2 1NO+2NC	VN CP22DH2 2NO+2NC
	5	VN CM12DH5 1NO+2NC	VN CP22DH5 2NO+2NC


Other cable lengths on request


## M12 connectors

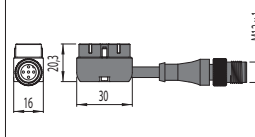metal connectors for NA and NB housings		
M12 connector, right	M12 connector, bottom	with cable and M12 connector
		
VN CM11DMK 1NO+1NC	VN CM11SMK 1NO+1NC	VN CM11DM0.2 1NO+1NC
VN CM02DMK 2NC	VN CM02SMK 2NC	VN CM02DM0.2 2NC
VN CM22DMK 2NO+2NC	VN CM22SMK 2NO+2NC	VN CM22DM0.2 2NO+2NC

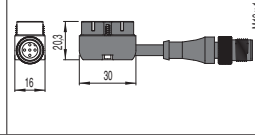technopolymer connectors for NF housings		
M12 connector, right	M12 connector, bottom	with cable and M12 connector
		
VN CP11DMK 1NO+1NC	VN CP11SMK 1NO+1NC	VN CP11DM0.2 1NO+1NC
VN CP02DMK 2NC	VN CP02SMK 2NC	VN CP02DM0.2 2NC
VN CP22DMK 2NO+2NC	VN CP22SMK 2NO+2NC	VN CP22DM0.2 2NO+2NC

## AMP connectors

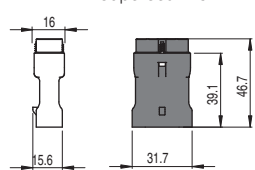technopolymer connectors for NA and NB housings	
AMP superseal 1.5	
	
VN CM11SAK 1NO+1NC	
VN CM02SAK 2NC	
VN CM20SAK 2NO	

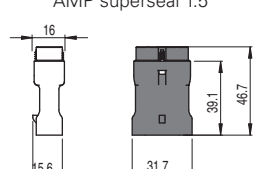technopolymer connectors for NF housings	
AMP superseal 1.5	
	
VN CP11SAK 1NO+1NC	
VN CP02SAK 2NC	
VN CP20SAK 2NO	

**Important:** Always check that the applied electric load is within the voltage and current limits defined for the connectors. See tables on page 118 and 128.

All values in the drawings are in mm

Accessories See page 207

→ The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)



# Actuators

VN AA0AA	VN AA0AB	VN AA0AC	VN AA0AE	VN AA0BB	VN AA0BE
VN AA0CB	VN AA0CH	VN AA0CP	VN AA0CV	VN AA0EB	VN AA0EE
VN AA0FB	VN AA0GB	VN AA0HB	VN AA0HE	VN AA0HH	

# Levers

ATTENTION: These separate actuators can be used only with items of the NA, NB and NF series.

VN A00KA	VN A00KB	VN A00KC	VN A00KD	VN A00KE	VN A00KF
VN A00KG	VN A00KH	VN A00KP	VN A00LB	VN A00LE	VN A00LH
VN A00LL	VN A00LP	VN A00KB-V38	VN A00KE-V38	VN A00KG-V38	VN A00KP-V38

# Heads

VN AA200

# 90° redirection

VN AA000-W5

All values in the drawings are in mm

Accessories See page 207

The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)