


Selection diagram

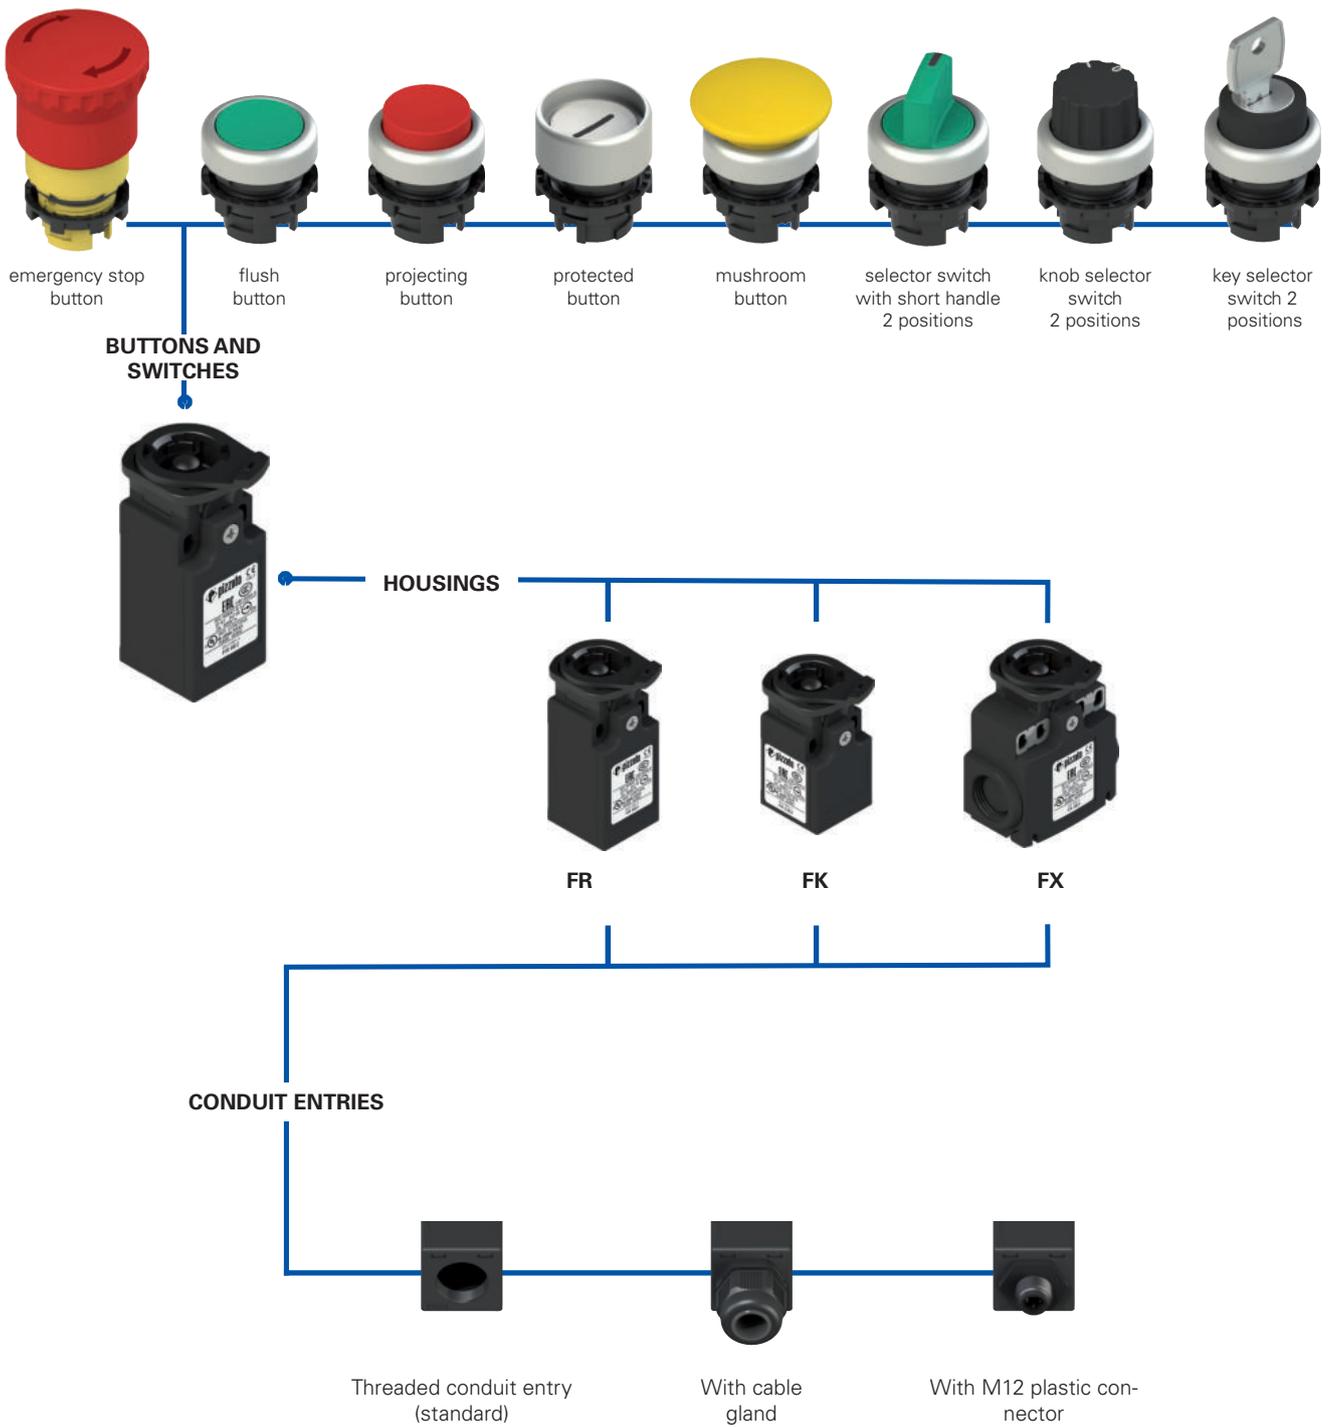

**Code structure** **Attention!** The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

article
option
option  
**FR 6E2-GM2K23T6**

Housing	
<b>FR</b>	technopolymer, one conduit entry
<b>FX</b>	technopolymer, two conduit entries

Ambient temperature	
	-25°C ... +80°C (standard)
<b>T6</b>	-40°C ... +80°C

Contact block	
<b>6</b>	1NO+1NC, slow action
<b>9</b>	2NC, slow action
<b>20</b>	1NO+2NC, slow action

Pre-installed cable glands or connectors	
	no cable gland or connector (standard)
<b>K23</b>	cable gland for cables Ø 6 ... 12 mm
...	.....
<b>K70</b>	M12 plastic connector, 4-pole
...	.....

Contact type	
	silver contacts (standard)
<b>G</b>	silver contacts with 1 µm gold coating
<b>G1</b>	silver contacts with 2.5 µm gold plating (not for contact block 20)

Threaded conduit entry	
<b>M2</b>	M20x1.5

For the complete list of possible combinations please contact our technical department.

article
option
option  
**FK 33E2-GM1K24T6**

Housing	
<b>FK</b>	technopolymer, one conduit entry

Ambient temperature	
	-25°C ... +80°C (standard)
<b>T6</b>	-40°C ... +80°C

Contact block	
<b>33</b>	1NO+1NC, slow action
<b>34</b>	2NC, slow action

Pre-installed cable glands	
	no cable gland (standard)
<b>K24</b>	cable gland for cables Ø 5 ... 10mm
<b>K28</b>	cable gland for cables Ø 3 ... 7mm

Contact type	
	silver contacts (standard)
<b>G</b>	silver contacts with 1 µm gold coating

Threaded conduit entry	
<b>M1</b>	M16x1.5



### Main features

- Protection degree IP67
- Technopolymer housing
- Versions with gold-plated silver contacts

### Quality marks:



IMQ approval:	EG610
UL approval:	E131787
CCC approval:	2020970305002284
EAC approval:	RU C-IT.YT03.B.00035/19

### Compliance with the requirements of:

Low Voltage Directive 2014/35/EU,  
EMC Directive 2014/30/EU,  
RoHS Directive 2011/65/EU.

### Positive contact opening in conformity with standards:

IEC 60947-5-1, EN 60947-5-1.

## Technical data

### General data

Housing made of glass fibre reinforced technopolymer, self-extinguishing, shock-proof and with double insulation	
FR series, one conduit entry:	M20x1.5
FK series: one threaded conduit entry:	M16x1.5
FX series, two knock-out threaded conduit entries:	M20x1.5
Protection degree:	IP67 acc. to EN 60529 with cable gland of equal or higher protection degree
Ambient temperature:	-25°C ... +80°C (standard) -40°C ... +80°C (T6 option)
Safety parameter $B_{10D}$ :	40,000,000
Max. actuation frequency:	3600 operating cycles/hour
Mechanical endurance:	20 million operating cycles
Utilization requirements:	See page 163

### Contact block

Switching force, FR, FX series contacts

1NO+1NC:	3.3 N (NC) / 6 N (NO)
2NC:	6.5 N
1NO+2NC:	5.8 N (NC) / 6.5 N (NO)

Switching force, FK series contacts

1NO+1NC:	4.5 N (NC) / 5.3 N (NO)
2NC:	4.4 N

FR, FX series limit of travel force

1NO+1NC:	9 N
2NC:	8.5 N
1NO+2NC:	10.3 N

FK series limit of travel force

1NO+1NC:	9.3 N
2NC:	8 N

Positive opening force

25 N

Actuation speed

min 1 mm/s

max. 0.5 m/s

Material of the contacts:

Normal: silver contacts (standard)

Low current: silver contacts with gold plating (on request)

Cable cross section (flexible copper strands)

Contact blocks 20, 33, 34:

min. 1 x 0.34 mm<sup>2</sup> (1 x AWG 22)

max. 2 x 1.5 mm<sup>2</sup> (2 x AWG 16)

Contact blocks 6, 9:

min. 1 x 0.5 mm<sup>2</sup> (1 x AWG 20)

max. 2 x 2.5 mm<sup>2</sup> (2 x AWG 14)

Cable stripping length:

7 mm for contact blocks 20, 33, 34

8 mm for contact blocks 6, 9

Tightening torque of the terminal screws:

0.6 ... 0.8 Nm

### In compliance with standards:

IEC 60947-5-1, EN 60947-5-1, EN 60947-1, EN 50047, IEC 60204-1, EN 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN 60529, EN IEC 63000, UL 508, CSA 22.2 No. 14, GB/T14048.5

### ⚠ Installation for safety applications:

Use only contact blocks marked with the symbol . The safety circuit must always be connected to **NC contacts** (normally closed contacts: 11-12, 21-22 or 31-32).

## Electrical data

## Utilization category

without connector	Thermal current ( $I_{th}$ ):	10 A	Alternating current: AC15 (50÷60 Hz)			
	Rated insulation voltage ( $U_i$ ):	500 Vac 600 Vdc	$U_e$ (V)	250	400	500
		400 Vac 500 Vdc (contact blocks 20, 33, 34)	$I_e$ (A)	6	4	1
	Rated impulse withstand voltage ( $U_{imp}$ ):	6 kV / 4 kV (contact blocks 20, 33, 34)	Direct current: DC13			
	Conditional short circuit current:	1000 A acc. to EN 60947-5-1	$U_e$ (V)	24	125	250
Protection against short circuits:	type aM fuse 10 A 500 V	$I_e$ (A)	3	0.55	0.3	
Pollution degree:	3					

with M12 connector, 4-pole	Thermal current ( $I_{th}$ ):	4 A	Alternating current: AC15 (50÷60 Hz)			
	Rated insulation voltage ( $U_i$ ):	250 Vac 300 Vdc	$U_e$ (V)	24	120	250
	Protection against short circuits:	type gG fuse 4 A 500 V	$I_e$ (A)	4	4	4
	Pollution degree:	3	Direct current: DC13			
			$U_e$ (V)	24	125	250
		$I_e$ (A)	3	0.55	0.3	

with M12 connector, 8-pole	Thermal current ( $I_{th}$ ):	2 A	Alternating current: AC15 (50÷60 Hz)			
	Rated insulation voltage ( $U_i$ ):	30 Vac 36 Vdc	$U_e$ (V)	24		
	Protection against short circuits:	type gG fuse 2 A 500 V	$I_e$ (A)	2		
	Pollution degree:	3	Direct current: DC13			
			$U_e$ (V)	24		
		$I_e$ (A)	2			

**Features approved by UL**

Electrical ratings: Q300 (69 VA, 125-250 Vdc)  
A600 (720 VA, 120-600 Vac)  
Housing features type 1, 4X "indoor use only", 12, 13.  
For all contact blocks except 2 and 3 use 60 or 75°C copper (Cu) conductors, rigid or flexible, wire size 12, 14 AWG. Tightening torque for terminal screws of 7.1 lb in (0.8 Nm).  
For contact blocks 2 and 3 use 60 or 75 °C copper (Cu) conductors, rigid or flexible, wire size 14 AWG. Tightening torque for terminal screws of 12 lb in (1.4 Nm).  
In compliance with standard: UL 508, CSA 22.2 No.14

**Please contact our technical department for the list of approved products.**

**Features approved by IMQ**

Rated insulation voltage (U<sub>i</sub>): 500 Vac  
400 Vac (for contact blocks 20, 33, 34)  
Conventional free air thermal current (I<sub>th</sub>): 10 A  
Protection against short circuits: type aM fuse 10 A 500 V  
Rated impulse withstand voltage (U<sub>imp</sub>): 6 kV  
4 kV (for contact blocks 20, 33, 34)  
Protection degree of the housing: IP67  
MV terminals (screw terminals)  
Pollution degree: 3  
Utilization category: AC15  
Operating voltage (U<sub>e</sub>): 400 Vac (50 Hz)  
Operating current (I<sub>e</sub>): 3 A  
Forms of the contact element: Za, Zb, Za+Za, Y+Y, X+X, Y+Y+X, Y+Y+Y, Y+X+X  
Positive opening of contacts on contact blocks 6, 9, 20, 33, 34  
In compliance with standards: EN 60947-1, EN 60947-5-1+ A1:2009, fundamental requirements of the Low Voltage Directive 2014/35/EU.


**Please contact our technical department for the list of approved products.**

**Description**



The protected contact block makes it possible to achieve an IP67 protection degree also in the contact area. This is essential if there is dust inside the panel (for example, in equipment used in the timber sector).  
The buttons, the 2-position selectors and the emergency stop buttons of the EROUND series can be used as normal actuators in the FR, FK, and FX protected contact blocks.

**Applications**

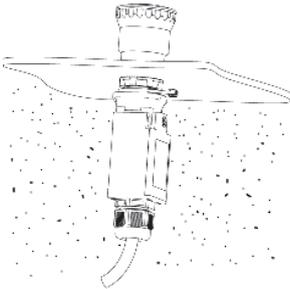

Protected contact block for control devices fitted in switching cabinets with the presence of dust also inside the cabinet. The block ensures an IP67 protection degree for internal electric contacts.

**Extended temperature range**

**-40°C**

These devices are also available in a special version suitable for an ambient operating temperature range from -40°C up to +80°C.

They can therefore be used for applications in cold stores, sterilisers and other equipment with low temperature environments. The special materials used to produce these versions retain their characteristics even under these conditions, thereby expanding the installation possibilities.

**Protection degree IP67**

**IP67**

These devices are designed to be used in the toughest environmental conditions and they pass the IP67 immersion test acc. to EN 60529.


They can therefore be used in all environments where maximum protection degree of the housing is required.

**Contact block**



Contact blocks with captive screws, finger protection, twin bridge contacts and double interruption for higher contact reliability. They are available in multiple variants with shifted activation travels, simultaneous or overlapping. They are suitable for many different applications.

**Gold-plated contacts**



The contact blocks of these devices can be supplied gold-plated upon request. Ideal for applications with low voltages or currents; it ensures increased contact reliability. Available in two thicknesses (1 or 2.5 microns), it adapts perfectly to the various fields of application, ensuring a long endurance over time.

## Selection table for contact blocks



Contact block	Article
1NO+1NC, slow action $\rightarrow$	FR 6E2-M2 
2NC, slow action $\rightarrow$	FR 9E2-M2 
1NO+2NC, slow action $\rightarrow$	FR 20E2-M2 



Contact block	Article
1NO+1NC, slow action $\rightarrow$	FX 6E2-M2 
2NC, slow action $\rightarrow$	FX 9E2-M2 
1NO+2NC, slow action $\rightarrow$	FX 20E2-M2 




Contact block	Article
1NO+1NC, slow action $\rightarrow$	FK 33E2-M1 
2NC, slow action $\rightarrow$	FK 34E2-M1 


## Dimensions

All values in the drawings are in mm


## FR series

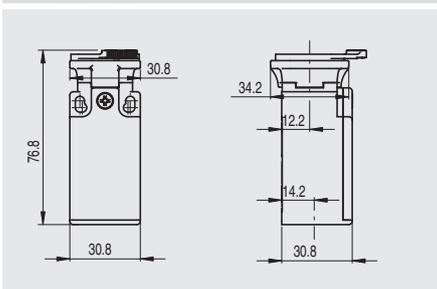

## FX series

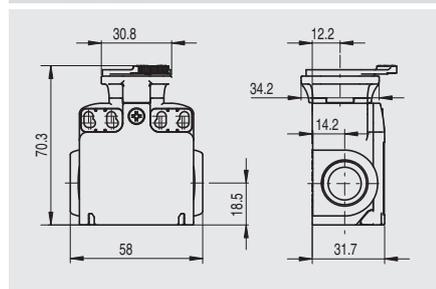

## FK series

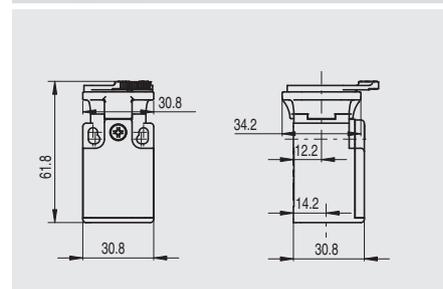

$\rightarrow$  The 2D and 3D files are available at [www.pizzato.com](http://www.pizzato.com)

## Limits of use

The protected contact block protects exclusively the electric contacts from fine dust or water coming from the switching cabinet.

The protected contact block can be combined only with following devices:

- E2 •PU••••• buttons
- E2 •PE••••• emergency stop buttons
- E2 •SE•2••••• two-position selector switches
- E2 •SC2••••• two-position key selector switches.

The protected contact block must be wired before the coupling with its actuator.

After the wiring, excessive traction on the cable or impacts on the housing can cause the detachment of the contact block from the actuator.

Do not use in environments with presence of explosive or flammable gas. In these cases, use ATEX products (see dedicated Pizzato catalogue).

